


2W isolated 4.2kVAC/6kVDC, Fixed Input voltage, unregulated Single or Dual Output

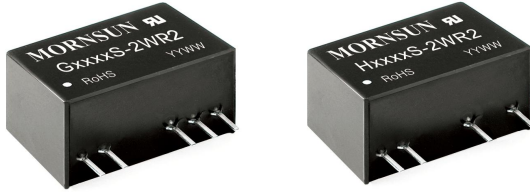

FEATURES

- High I/O Isolation voltage of 4200VAC/6000VDC
- Reinforced insulation
- Patient leakage current 2μA max.
- High efficiency up to 84%
- Operating ambient temperature -40°C to +85°C
- Internal surface mount design
- SIP package
- Industry standard pin-out
- EN60601-1, ANSI/AAMI ES60601-1 approval (1xMOPP/2xMOOP)

G_S-2WR2 & H_S-2WR2 series meets reinforced insulation requirements. They are especially designed for applications where extremely high isolation, low insulation capacitor with low leakage current in a compact package size is required. They are widely used in applications such as medical, electrical grid, IGBT driver circuits and similar where:

1. The voltage of the input power supply is relatively stable with a variation of $\pm 10\%V_{in}$ or less;
2. An extremely high input to output isolation voltage of up to 4200VAC or 6000VDC is required;
3. The requirement for ripple & noise or a tight output regulation is not as strict.

Selection Guide

Certification	Part No.	Input Voltage (VDC)	Output		Full Load Efficiency (%) Min./Typ.	Max. Capacitive Load* (μF)	
		Nominal (Range)	Voltage(VDC)	Current (mA) Max./Min.			
UL/CE	G0505S-2WR2	5 (4.5-5.5)	±5	±200/±20	74/78	470	
	G0509S-2WR2		±9	±111/±12	74/78	470	
	G0512S-2WR2		±12	±83/±9	74/78	220	
	G0515S-2WR2		±15	±67/±7	76/80	220	
	H0505S-2WR2		5	400/40	73/77	1000	
	H0512S-2WR2		12	167/17	75/79	470	
	H0515S-2WR2		15	133/14	75/79	470	
	UL/CE	G1205S-2WR2	12 (10.8-13.2)	±5	±200/±20	70/74	470
		G1209S-2WR2		±9	±111/±12	76/80	470
		G1212S-2WR2		±12	±83/±9	76/80	220
		G1215S-2WR2		±15	±67/±7	73/77	220
		H1205S-2WR2		5	400/40	72/76	1000
		H1212S-2WR2		12	167/17	75/79	470
		H1215S-2WR2		15	133/14	77/81	470
--	G1505S-2WR2	15 (13.5-16.5)	±5	±200/±20	73/77	470	
	G1509S-2WR2		±9	±111/±12	76/80	470	
	G1515S-2WR2		±15	±67/±7	69/73	220	
UL	H1505S-2WR2	15 (13.5-16.5)	5	400/40	73/77	1000	
--	H1515S-2WR2		15	133/14	78/82	470	
UL/CE	G2405S-2WR2	24 (21.6-26.4)	±5	±200/±20	75/79	470	
	G2409S-2WR2		±9	±111/±12	77/81	470	
	G2412S-2WR2		±12	±83/±9	78/82	220	
	G2415S-2WR2		±15	±67/±7	77/81	220	
	H2405S-2WR2		5	400/40	75/79	1000	
	H2412S-2WR2		12	167/17	78/82	470	
	H2415S-2WR2		15	133/14	80/84	470	

* Note: The specified maximum capacitive load for positive and negative output is identical.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (no-load/full load)	5V input	--	35/520	80/--	mA
	12V input	--	15/217	40/--	
	15V input	--	18/171	40/--	
	24V input	--	10/106	25/--	
Surge Voltage (1sec. max.)	5V input	-0.7	--	9	VDC
	12V input	-0.7	--	18	
	15V input	-0.7	--	21	
	24V input	-0.7	--	30	
Reflected Ripple Current*		--	0.2	--	A
Input Filter		Capacitor filter			
Hot Plug		Unavailable			

* Note: Please refer to DC-DC Converter Application Note for detailed description of Reflected ripple current testing method.

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Accuracy*		See Typical Performance Curves (Fig. 1)				
Line Regulation	Input voltage change: ±1%	--	--	±1.2	--	
Load Regulation	10%-100% load	5VDC output	--	--	20	%
		9VDC output	--	--	15	
		12VDC output	--	--	15	
		15VDC output	--	--	15	
Ripple & Noise**	20MHz bandwidth	--	100	150	mVp-p	
Temperature Coefficient	100% full load	--	±0.02	--	%/°C	
Output Short Circuit Protection***		--	--	3	s	

Note: *Output voltage accuracy of G1515S-2WR2 with 10% load, Min. -5%.
 **The "parallel cable" method is used for Ripple and noise test, please refer to *DC-DC Converter Application Notes* for specific information.
 *** At the end of the short circuit duration, the supply voltage must be disconnected from the modules.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage	Input-output Electric strength test for 1 minute	4200	--	--	VAC
		6000	--	--	VDC
Patient Leakage Current	250VAC, 50/60Hz	--	--	2	μA
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	MΩ
Insulation Capacitance	Input-output capacitance at 100kHz/0.1V	--	5	--	pF
Operating Temperature		-40	--	85	°C
Storage Temperature		-55	--	125	
Case Temperature Rise	Ta=25°C	--	25	--	
Pin Soldering Resistance Temperature	1.5mm away from the case for 10 seconds	--	--	300	
Storage Humidity	Non-condensing	--	--	95	%RH
Switching Frequency	100% load, nominal input voltage	--	100	--	kHz
MTBF	MIL-HDBK-217F @ 25°C	3500	--	--	k hours
Transformer Creepage & Clearance Distance		5	--	--	mm
PCB Creepage & Clearance Distance		5.5	--	--	

Note: 1. Patient leakage current and reinforced insulation is based on a 250 VAC, 50/60 Hz system input voltage.
 2. The UL certification (ANSI/AAMI ES60601-1, File No. E347375) of G_S-2WR2 & H_S-2WR2 series is approved, G_S-2WR2 & H_S-2WR2 series meets 1xMOPP/2xMOOP when system input voltage is 250VAC, 50/60Hz.

Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL94 V-0)
Package Dimensions	19.50 x 9.80 x 12.50 mm
Weight	4.2g (Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

EMI	CE	EN60601-1-2/CISPR 11 GROUP1 CLASS B (see Fig. 5 for recommended circuit)
	RE	EN60601-1-2/CISPR 11 GROUP1 CLASS B (see Fig. 5 for recommended circuit)
EMS	ESD	EN60601-1-2/IEC/EN61000-4-2 Contact $\pm 8kV$ performance Criteria B

Typical Performance Curves

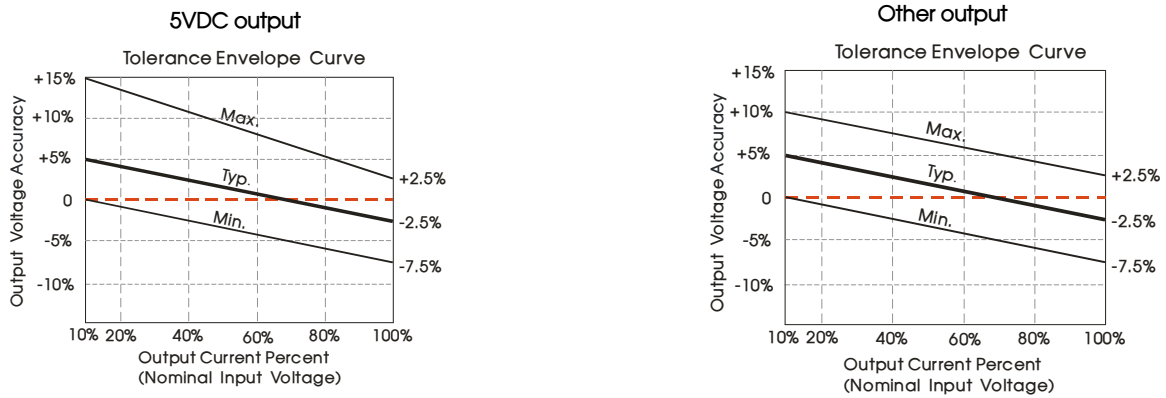


Fig. 1





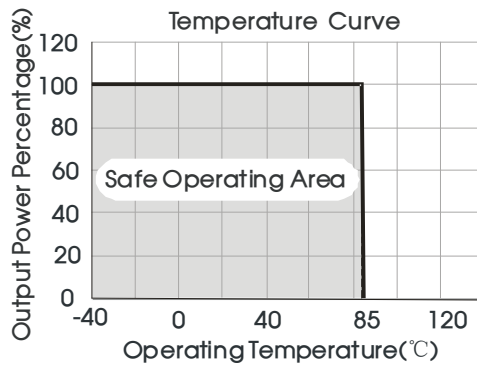


Fig. 2

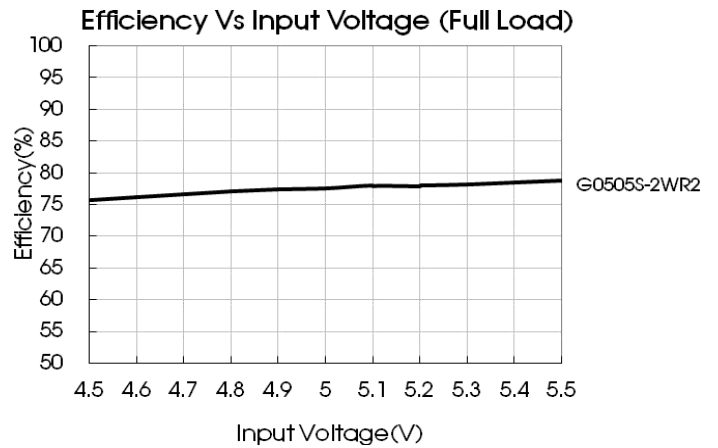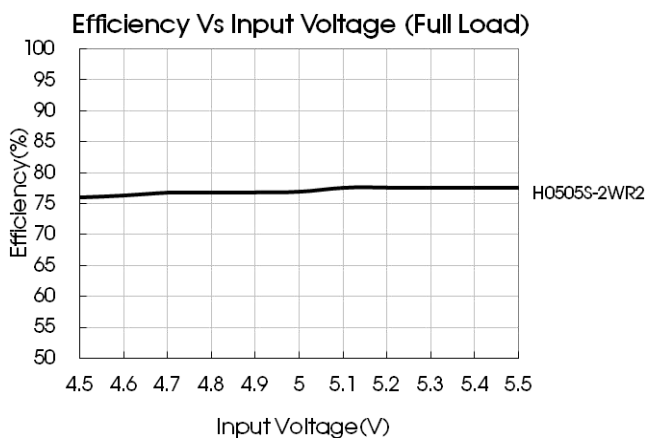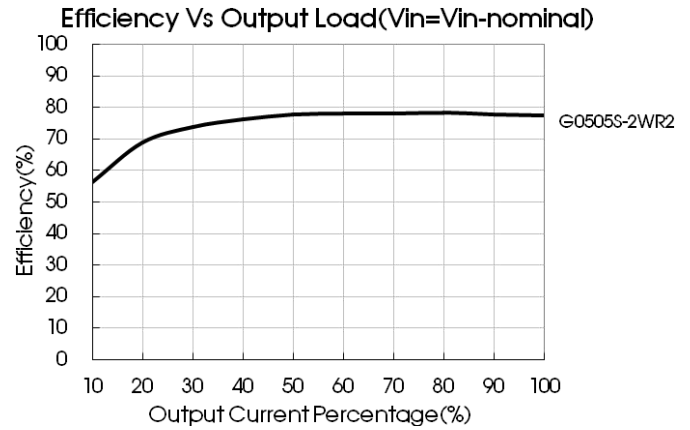

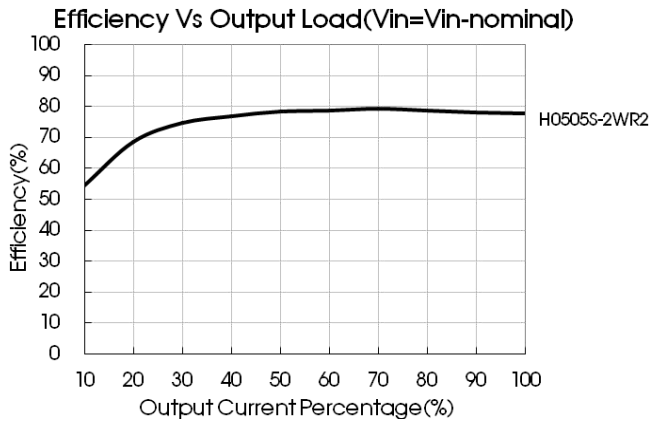

Design Reference

1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig.3.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.

For a tight output voltage regulation, including overvoltage, overcurrent and over temperature protection, we recommend the use of a linear regulator that is connected in series to the input and/or output terminals as shown in Fig. 4.

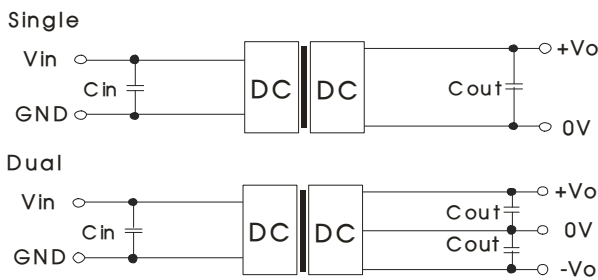


Fig. 3

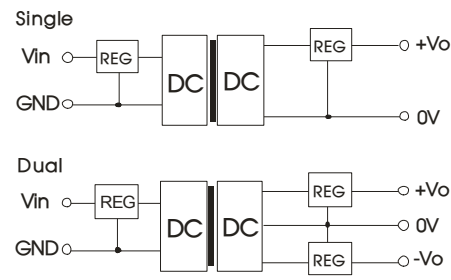


Fig. 4

Table 1: Recommended input and output capacitor values

Vin (VDC)	Cin (μF)	Single Vout (VDC)	Cout (μF)	Dual Vout (VDC)	Cout (μF)
5	10	5	10	±5	4.7
12/15	4.7	12	2.2	±9	2.2
24	2.2	15	1	±12/±15	1

2. EMC (CLASS B) compliance circuit

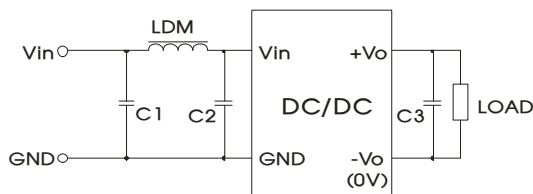


Fig. 5

Table 2: Recommended EMC filter values

Input voltage (V)		5/12/15	24
EMI	C1,C2	4.7μF /50V	
	C3	Refer to the Cout in Fig.3	
	LDM	6.8μH	15μH

Note: C1 and C2 of G1515S-2WR2 is 10μF/25V, LDM of G1515S-2WR2 is 22μH.



3. Output load requirements

For a reliable and efficient operation of the converter, the minimum load should never be less than 10% of the rated output load. If the total required output power is below 10%, a parallel bleeding resistor is required on the output, ensuring that the sum of the power consumption is always maintained at 10% minimum.

4. For additional information, please refer to DC-DC converter application notes on

www.mornsun-power.com

Dimensions and Recommended Layout

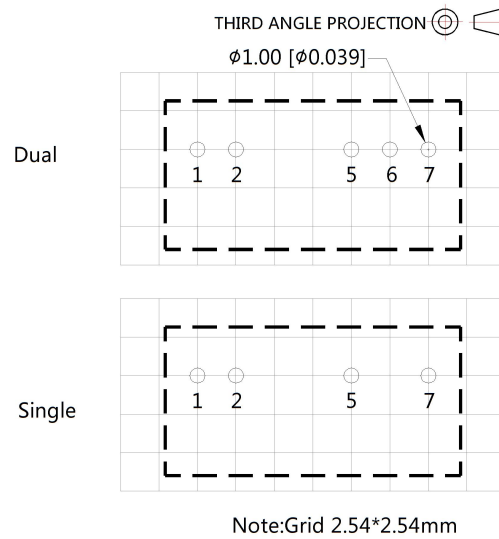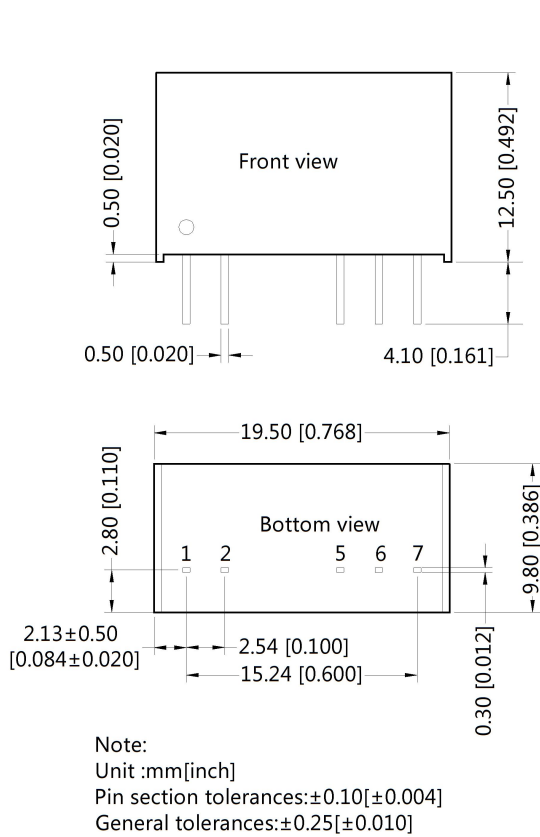

Pin-Out		
Pin	Single	Dual
1	Vin	Vin
2	GND	GND
5	0V	-Vo
6	No Pin	0V
7	+Vo	+Vo

Notes:

- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58200013;
- In order to guarantee product performance and datasheet compliance, the product must be operated within specifications and load range requirement;
- The specified maximum capacitive load is tested under full load condition and over the input voltage range;
- All parameters in this datasheet were measured under following conditions: Ta=25°C, relative humidity <75%RH, nominal input voltage and rated output load (unless otherwise specified);
- All index testing methods in this datasheet are based on our Company's corporate standards;
- For special requirements and customization service, please contact your nearest MORNUSN sales representative or one of our technicians;
- Products are related to laws and regulations: see "Features" and "Electromagnetic Compatibility (EMC)";
- Our products shall be handled according to ISO14001 and related environmental laws and regulations by qualified personnel only.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: sales@mornsun.cn www.mornsun-power.com