

Single high speed RS485 isolated transceiver module (with distribution)



FEATURES

- Integrated high efficient isolated DC-DC converter
- High baud rate of up to 115200bps
- Two-port isolation test voltage(2.5kVDC)
- Operating ambient temperature range: -40°C to +85°C
- The bus supports maximum 32 nodes
- Set isolation and ESD bus protection in one

The main function of the TD1211D485H/ TD2411D485H series is to convert a logic level signal into isolated RS485 differential level signals. The special integrated IC technology of the RS485 transceiver achieves isolation between the power supply and the signal lines isolation, does RS485 communication and protects the bus all in one and the same module. The product's isolated power supply withstands a test voltage of up to 2500VDC. Also, they can easily be embedded in the user's end equipment, to achieve fully functional RS485 network connections.

Selection Guide

Certification	Part No.	Power Supply input (VDC)	Baud rate (bps)	Static Current (mA)	Max. Operating Current (mA)	Isolated power output (typ.)(VDC)	Number of Nodes
--	TD1211D485H	11.4-12.6	115200	25	40	5	32
	TD2411D485H	22.8-25.2	115200	18	25	5	32

Input Specifications

Item	Operating Conditions		Value
Input Power Supply	Static Current	12V power supply	≤25mA
		24V power supply	≤18mA
	Send Current	Isolated power without load	12V power supply ≤40mA 24V power supply ≤25mA
Input	Serial Interface	TD1211D485H	Compatible with + 5V UART interface only
		TD2411D485H	Compatible with + 5V UART interface only
	Pin Current		I _{TXD} ≤2mA; I _{RXD} ≤2 mA; I _{CON} ≤5mA

Bus Interface

Item	Operating Conditions		Value
Output	Isolation Power Output	Output voltage	4.75V - 5.8V
		Output power	≤0.4W
	RS485 Bus Interface		Standard RS485 interface, pull-up and pull-down resistors with 4.7k Ω each on A and B channels.

Transmission Specifications

Item	Operating Conditions		Value			
Data Rate			115200bps (max.)			
Transceiver Switching Delay			30us-100us Delay time (min. to max.) for transition from receiving data to sending data			
Number of Nodes			Up to 32 nodes connected on one bus			
Transceiver Control			Refer to below truth table			
Truth Table	Sending status	Input		Output		
		CON	TXD	A	B	Line state
		0	1	1	0	Normal
		0	0	0	1	Normal
	Receiving status ^①	Input		Output		
		CON	A-B	RXD		
		1	≥-10mV	1		
		1	≤-200mV	0		
	1	-200mV < V _A -V _B < -10mV	Undefined state			

Note: ① Receiving threshold varies with V_{cc} will produce subtle error.

General Specifications

Item	Operating Conditions	Value
Electric Isolation		Two-terminal isolation (input and output are mutually isolated)
Isolation Test	Electric Strength Test for 1 min., leakage current <5mA	2500VDC
Operating Temperature		-40°C to +85°C
Transportation and Storage Temperature		-50°C to +105°C
Operating Humidity		10% - 90%
Temperature Rising	Ta=25°C	25°C (Typ.)
Application Environment		The presence of dust, severe vibration, shock and corrosive gas may cause damage to the product

Mechanical Specifications

Case Material	Black flame-retardant heat-proof plastic (UL94-V0)
Package	DIP10
Dimensions	19.90*16.90*7.05 mm
Weight	4.0g(Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS A (see 2-②)	
	RE	CISPR32/EN55032	CLASS A (see 2-②)	
Immunity	ESD	IEC/EN61000-4-2	Contact ±4kV	perf. Criteria B
		EFT	IEC/EN61000-4-4	±2kV (Power supply port) (see 2-①)
	IEC/EN61000-4-4		±1kV (Signal port) (see 2-③)	perf. Criteria B
	Surge	IEC/EN61000-4-5	±1kV (Power supply port) (see 2-①)	perf. Criteria B
			±0.25kV/±0.5kV (Signal port) (see 2-③)	perf. Criteria B
			±0.5kV/±1kV (Signal port) (see 2-③)	perf. Criteria B
			±1kV/±2kV (Signal port) (see 2-③)	perf. Criteria B
			±2kV/±4kV (Signal port) (see 2-③)	perf. Criteria B
±4kV/±6kV (Signal port) (see 2-③)	perf. Criteria B			

Application Precautions

- Carefully read and follow the instructions before use; contact our technical support if you have any question;
- Do not use the product in hazardous areas;
- Use only DC power supply source for this product. 220V AC power supply is prohibited;
- It is strictly forbidden to disassemble the product privately in order to avoid product failure or malfunction.

After-sales service

- Factory inspection and quality control are strictly enforced before shipping any product; please contact your local representative or our technical support if you experience any abnormal operation or possible failure of the module;
- The products have a 3-year warranty period, from the date of shipment. The product will be repaired or exchanged free of charge within the warranty period for any quality problem that occurs under normal use.

Applied circuit

Refer to the *RS485 Isolated Industrial Bus Interface Module Application Manual*.

Design Reference

1. Typical application

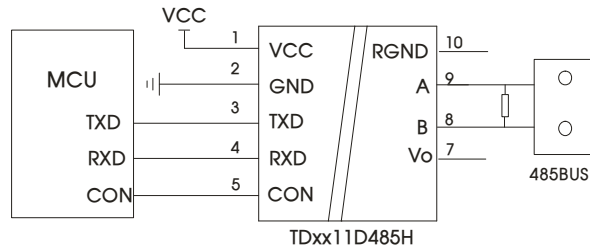


Fig. 1

2. Recommended EMC circuit

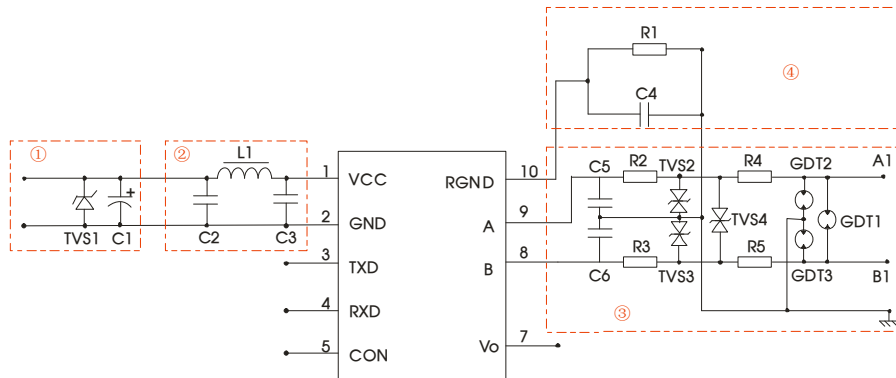


Fig. 2


Recommended external circuit parameters:

Model	TD1211D485H / TD2411D485H				
	$\pm 0.25\text{kV}/\pm 0.5\text{kV}$	$\pm 0.5\text{kV}/\pm 1\text{kV}$	$\pm 1\text{kV}/\pm 2\text{kV}$	$\pm 2\text{kV}/\pm 4\text{kV}$	$\pm 4\text{kV}/\pm 6\text{kV}$
C1	220 $\mu\text{F}/10\text{V}$ (Electrolytic capacitor)		220 $\mu\text{F}/10\text{V}$ (Electrolytic capacitor)		
TVS1	SMCJ5.0A (TD1211D485H) / SMCJ6.5A(TD2411D485H)				
C2/C3	1 $\mu\text{F}/50\text{V}$		1 $\mu\text{F}/50\text{V}$		
L1	10 μH		10 μH		
C5/C6	100pF/100V		100pF/100V		
C4	1nF/2kV		1nF/2kV		
R1	1M Ω		1M Ω		
TVS2/TVS3/TVS4	SMBJ15CA		SMBJ15CA		
R4/R5	--	--	10 $\Omega/2\text{W}$ (Wire-wound resistor)	10 $\Omega/2\text{W}$ (Wire-wound resistor)	10 $\Omega/2\text{W}$ (Wire-wound resistor)
R2/R3	10 $\Omega/1\text{W}$ (Wire-wound resistor)	10 $\Omega/2\text{W}$ (Wire-wound resistor)	--	--	--
GDT1/GDT2/GDT3	--	--	G30-A90X	S30-A90X	S50-A90X


Notes: GDT1/GDT2/GDT3 can be replaced by a three terminal gas discharge tube.
For example, GDT1/GDT2/GDT3 can be replaced by B3D090L-C.

3. For additional information, please refer to our application note on www.mornsun-power.com

Dimensions and Recommended Layout

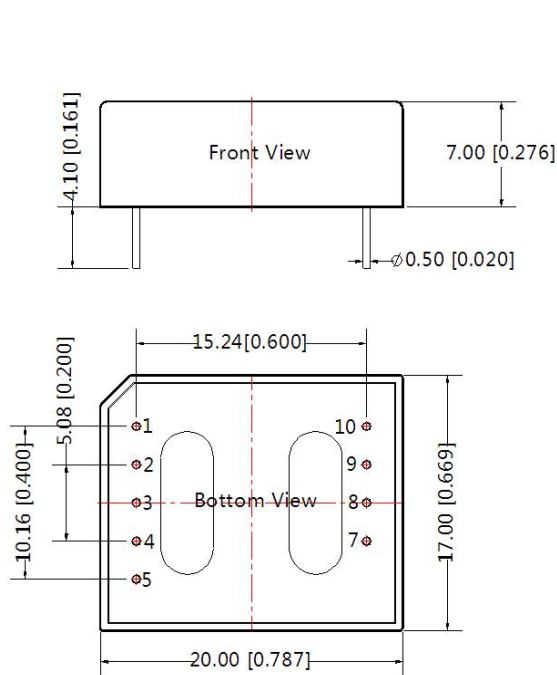

Note:
Unit :mm[inch]
Pin diameter tolerances : $\pm 0.10[\pm 0.004]$
General tolerances: $\pm 0.50[\pm 0.020]$

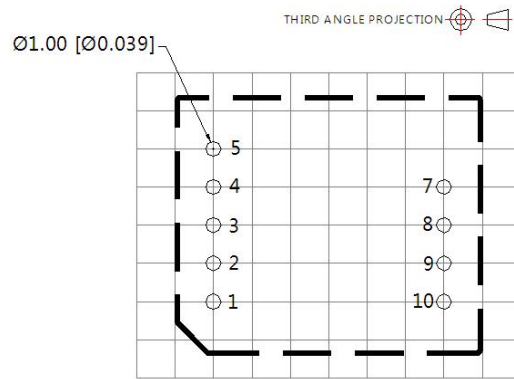

Note: Grid 2.54*2.54mm

Pin-Out		
Pin	Designation	Function
1	VCC	Input Power
2	GND	GND
3	TXD	TD_D485H Send Pin
4	RXD	TD_D485H Receiving Pin
5	CON	Send&Receiving Control Pin
7	Vo	Isolation Power Output +5V
8	B	TD_D485H B Pin
9	A	TD_D485H A Pin
10	RGND	Isolation Power Output RGND

Notes:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. The Packaging bag number: 58040012;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on company corporate standards;
4. The above are the performance indicators of the product models listed in this datasheet. Some indicators of non-standard models will exceed the above requirements. For details, please contact our technical staff;
5. We can provide product customization service;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: sales@mornsun.cn